Technical Data

Repeatab

Repeatability:	0.01 mm
Fine feed:	6 mm (.24")
Battery:	SR44 (1 pc.), 938882
Battery life:	20,000 hours under normal use

Functions

Zero-setting +/- directional measurement Data hold Data output Presetting inch/mm reading (inch/mm models) Preset value memory Origin restoration Low battery voltage alert Counting value composition error alert

Optional Accessories

Code No.	Description	
905338	SPC data cable (1 m)	
905409	SPC data cable (2 m)	
02AZD790F	U-WAVE-T data cable (160 mm)	
02AZE140F	U-WAVE-T data cable with footswitch (160/500 mm)	
06AFM380F	USB input tool direct USB-ITN-C (2 m)	

SERIES 570 – ABSOLUTE Digimatic Height Gauge

- ABS and INC measurement modes allow efficient operation.
- Rigid structure makes instrument suitable for use in severe work environments.
- The +/- measurement function widens the application range.
- Allows integration into statistical process control and measurement systems.
- Carbide-tipped scriber (05GZA033) is provided as a standard accessory.

MeasurLink[®] **ENABLED** Data Management Software by Mitutoyo ABSOLUTE




570-248

Specifications

nch/Metric	
------------	--

Code No.	Range	Accuracy*	Resolution	Height	Mass	
570-248	0-1000 mm (0-40")	±0.07 mm (±.003")	0.01 mm (.0005")	1260 mm	16.8 kg	
* Excluding quantizing error.						

Dimensions

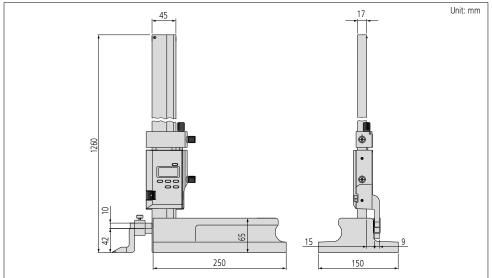



Mitutoyo