


Technical Data for 573 series

Dust/water protection level:	IP67*1
Scale type:	ABSOLUTE electromagnetic induction linear encoder
Max. response speed:	Unlimited
Battery:	SR44 (1 pc.), 938882
Battery life:	Approx. 3 years under normal use (1 year for models over 300 mm)

*1 Rustproofing treatment to be applied after use.

Optional Accessories for 573 series

Code No.	Description
264-620	U-WAVE-TC transmission unit
02AZF310	U-WAVE-TC connection unit
05CZA624	SPC data cable with pushbutton (1 m)
05CZA625	SPC data cable with pushbutton (2 m)
06AFM380A	USB input tool direct USB-ITN-C (2 m)



Application example.

SERIES 573, 536 – Neck Jaw Caliper

- Can measure wall thickness inside bores and recesses.
- Digimatic models feature Mitutoyo's ABSOLUTE system with IP67 ingress protection. No need to reset the origin after switching on.
- Digimatic models enable integration into statistical process control and measurement systems.


MeasurLink ENABLED
Data Management Software by Mitutoyo

ABSOLUTE

IP67



573-752-20

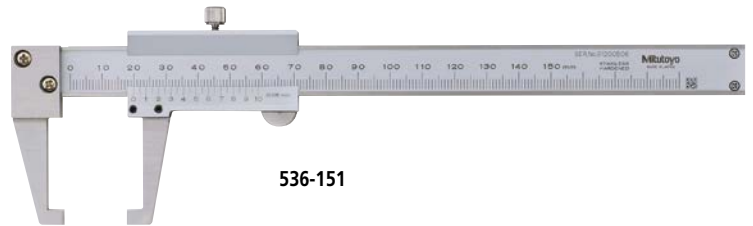

536-151

Specifications

Inch/Metric

Code No.	Range	Resolution	Accuracy*2	Remarks
ABSOLUTE Digimatic type				
573-751-20	0 - 150 mm (0 - 6")	0.01 mm (.0005")	±0.03 mm (±.0015")	—
573-752-20				Point type

Metric

Code No.	Range	Graduation	Accuracy	Remarks
Vernier type				
536-151	0 - 150 mm	0.05 mm	±0.05 mm	—
536-152				Point type

*2 Excluding quantizing error.

Dimensions

