


E30396

USB IO-LINK INTERFACE

Parameter setting systems

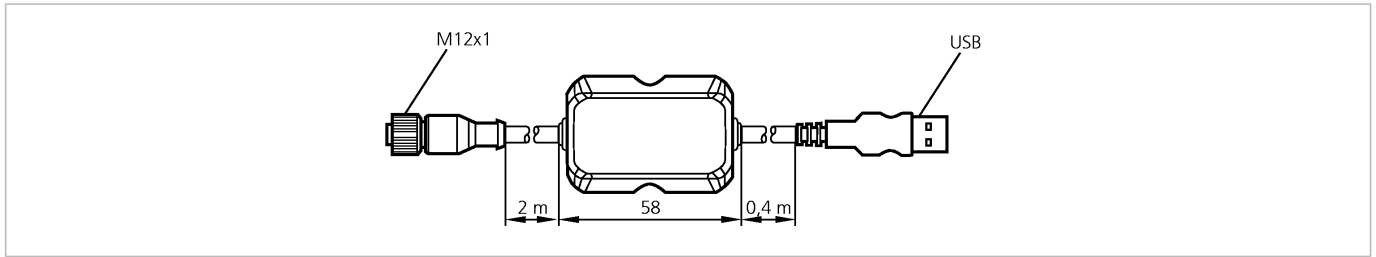

Made in Germany

Product characteristics

IO-Link interface

for parameter setting and analysis of units

Supported communication protocols:

IO-Link (4800 and 38400 bits/s)

EPS protocol (19200 bits/s)

for operation with FDT framework software "ifm Container" or software "LINERECORDER SENSOR"

Environment




Ambient temperature [°C] -25...45

Mechanical data

Weight [kg] 0.191

Electrical connection

Wiring

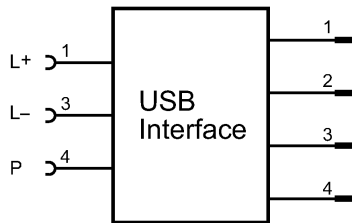

P = Communication via IO-Link

Accessories

Accessories (optional)

FDT framework software "ifm Container" (order no. E30110), also available for download on the ifm website;
software "LINERECORDER SENSOR" (order no. ZGS210)

Remarks

Pack quantity [piece] 1

Other data

Interface supply input voltage: 5 V
current consumption from USB port: max. 500 mA

Sensor supply output voltage: 24 V DC
output current: ≤ 65 mA

Connection connection cable for the sensor: 2 m
USB cable: 0.4 m