


OGE500

OGE-FPKG/US100

Photoelectric sensors



1: Programming buttons

Made in Germany



Product characteristics

Through-beam sensor

Threaded type

M18 x 1

Connector

Receiver

Sensing range 25m

adjustable

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...36 DC
Current consumption [mA]	11
Type of light	Red light 624 nm
Protection class	II
Reverse polarity protection	yes

Outputs

Output function	light-on / dark-on programmable via pushbutton
Factory setting	dark-on mode
Voltage drop [V]	< 2.5
Current rating [mA]	200 (...60 °C) / 150 (...80 °C)
Short-circuit protection	pulsed
Overload protection	yes
Switching frequency [Hz]	1000

Range


Sensing range [m]	25
-------------------	----

Excess gain graphs

OGE500

OGE-FPKG/US100

Photoelectric sensors

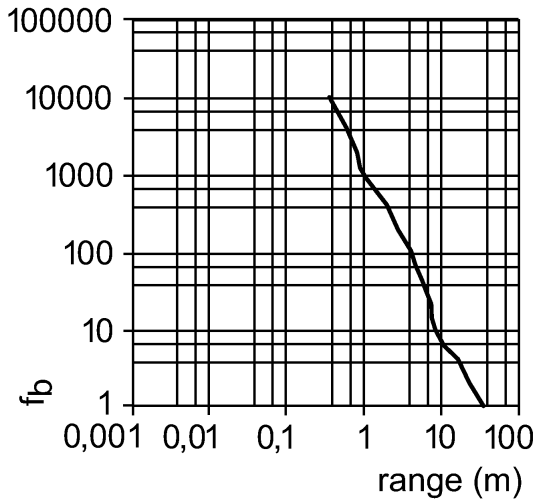

Environment

Ambient temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

EMC		EN 60947-5-2
MTTF	[Years]	786

Mechanical data

Housing materials		stainless steel 316L / 1.4404; PA; LCP; EPDM; TPU
Lens material		PMMA
Weight	[kg]	0.062


Displays / operating elements

Output status indication	LED	yellow
--------------------------	-----	--------

Electrical connection

Connection		M12 connector
------------	--	---------------

Wiring



Accessories

Accessories (included)		2 lock nuts
------------------------	--	-------------

Remarks

Remarks		cULus - Class 2 source required
---------	--	---------------------------------

Pack quantity	[piece]	1
---------------	---------	---